

ICA[®] Uninterruptible Power Supply




The Best Solution For Power System

FEATURES :

CT SERIES

- EMI / RFI FILTER
- BUILD IN STABILIZER
- AUDIBLE AND VISUAL INDICATOR
- BUILD IN SLA BATTERY
- BATTERY INDICATOR
- COMPUTER INTERFACE PORT RS232
- COMPACT DESIGN
- MODEM PROTECTOR
- COMPACT SIZE and LIGHTWEIGHT
- EASY TO USE
- HIGH EFFICIENCY
- HIGH RELIABILITY

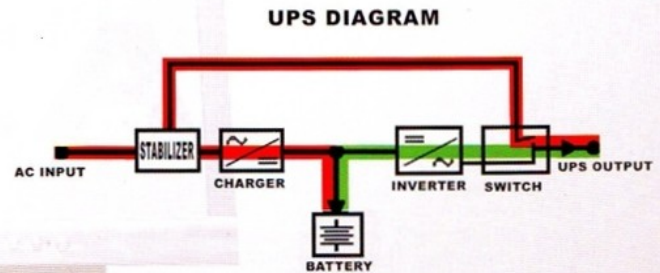

Protect your computers and sensitive equipments from any electrical disturbance

ITEM		UNITS	SPECIFICATION					REMARKS
MODEL			CT 382B	CT 682B	CT 1082B	CT 1382B	CT 1682B	
CAPACITY		VA/W	600/300	1200/600	2000/1000	2600/1300	3200/1600	MAXIMUM
AC INPUT	VOLTAGE	V	160 - 250					
	CURRENT	A	1.6	2.9	4.8	6.2	7.7	MAX. LOAD & CHARGER
	FREQUENCY	Hz	50 ± 3					
	PROTECTION	A	3	5	10	10	10	FUSE
DC INPUT	INTERNAL BATTERY		1 x 12V, 7 AH	2 x 12V, 7 AH	3 x 12V, 7 AH	4 x 12V, 7 AH	5 x 12V, 7 AH	SEALED LEAD ACID BATTERY
	PROTECTION	A	30	40	50	50	50	
INVERTER OUTPUT	WAVE FORM		SYNTHESIZED SINEWAVE (STEP WAVE)					PWM
	VOLTAGE	V	220 ± 5%					
	FREQUENCY	Hz	50					
	EFFICIENCY	%	> 80					
C.H.G	TYPE		CONSTANT VOLTAGE					
	VOLTAGE	V	13.6	27.2	40.8	54.4	68	
	CURRENT	A	1.5					
TRANSFER TIME	ms	≤ 4						
BACK UP TIME	min	10					NOMINAL LOAD	
INDICATOR		LED & BUZZER					REFER TO CONDITION TABLE	
OPERATION TEMPERATURE	°C	0 - 40						
DIMENSION	mm	340 x 95 x 145	390 x 145 x 195	430 x 175 x 230	445 x 175 x 230		D x W x H	
WEIGHT	Kg	6.5	15.2	19.2	23.4	26.4		

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

CONTACT PERSON :

481-4120010-110